



Lindab **LKA**

Formo - Ceiling diffuser



Formo - Ceiling diffuser

LKA



Description

LKA is a square diffuser with unperforated face plate and can be used for both supply and extract air. LKA is suitable for horizontal supply of cooled air and can be equipped with accessories of various types in order to achieve optimal function.

Installing a LKA diffuser in a plenum box type MB or CB can help to achieve a stable airflow to the diffuser as well as realize the potential for individual adjustment.

MB box with damper type B is with a unique linear cone damper which allows to use the full operational working area and can balance with a high balancing pressure with low sound generation. Furthermore the construction of the damper provides a linear balancing characteristic, as well as an accurate and reliable measurement.

MB and CB box with damper type C or E are with rotating blade dampers for respectively supply and extract. Typically used in applications that do not require a high balancing pressure in the plenum box.


- Suitable for both supply and extract air
- Suitable for horizontal supply of cooled air
- Option of 1, 2 and 3-way supply air
- Plenum box with several damper options

Order Code

Product	LKA	aaa
Type		
LKA		
Connection dim Ød		
Ø125 - 400		

Example: LKA-200

Dimensions

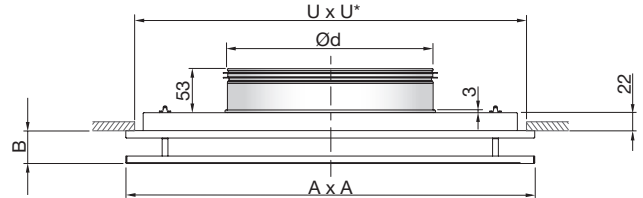

LKA Ød mm	A mm	B mm	U* mm	Free area A m ²	m kg
125	235	37	200	0.011	1.0
160	295	37	260	0.016	1.5
200	395	37	360	0.022	2.5
250	495	41	460	0.033	3.7
315	595	41	560	0.041	5.1
400	595	41	560	0.042	5.1

* U x U = Ceiling grid opening.

Maintenance

The face plate can be removed to enable cleaning of internal parts or to gain access to the duct or box. The visible parts of the diffuser can be wiped with a damp cloth.

Materials and finish

Upper part: Galvanised steel
 Standard finish: Powder-coated
 Standard colours: RAL 9003 or RAL 9010, gloss 30



The diffuser is available in other colours. Please contact Lindab's sales department for further information.

Formo - Ceiling diffuser





LKA

Accessories


DRZ - Balancing damper

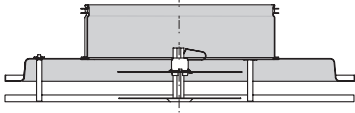



DAZ - Directional deflector (set)



MBZ - Extension piece



DKZ - Mounting brackets (set)

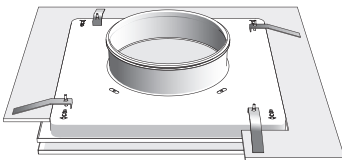

Order Code - accessories

Product _____ **aaa** **bbb**
 Type _____
 Size _____

Example: DRZ-200

LM - Module plate



Order Code - module plate


Product _____ **LM** **a** **LKA** **ccc**
 Type _____
 Ceiling system _____
 Diffuser _____
 Size _____

Example: LM-1-LKA-200

Formo - Ceiling diffuser

LKA

LKA + MB plenum box

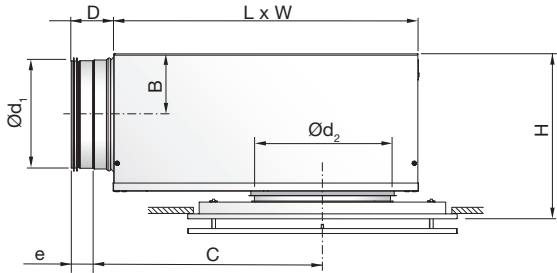


LKA + MB

Ød ₁ mm	Ød ₂	B	C	D	e	H*	L	W
100	125	62	245	78	40	197 - 237	310	260
100	160	62	245	78	40	197 - 237	310	260
125	125	75	291	78	40	222 - 262	376	310
125	160	75	291	78	40	222 - 262	376	310
125	200	75	291	78	40	222 - 262	376	310
160	160	92	352	78	40	256 - 296	459	380
160	200	92	352	78	40	256 - 296	459	380
160	250	92	352	78	40	256 - 296	459	380
200	200	112	425	78	40	297 - 337	565	460
200	250	112	425	78	40	297 - 337	565	460
200	315	112	425	78	40	297 - 337	565	460
250	250	137	534	118	60	347 - 387	698	540
250	315	137	534	118	60	347 - 387	698	540
250	400	137	534	118	60	347 - 387	698	540
315	315	170	695	118	60	412 - 452	858	540
315	400	170	695	118	60	412 - 452	858	540

* Using accessory MBZ the H dimension will increase:

- Ød₂ = 125 - 200 mm => H +40 mm
- Ød₂ = 250 - 315 mm => H +60 mm
- Ød₂ = 400 mm => H +80 mm

Damper options

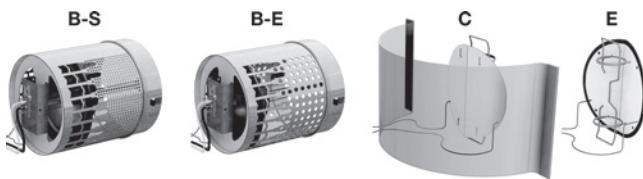

Order Code

Product _____

Type
MB _____

Damper
B = Linear cone damper
C = Blade damper supply
E = Blade damper extract


Duct connection Ød₁
Ø100-315 _____

Diffuser dimension Ød₂
Ø125 - 400 _____

Function (Only for B damper)
S = Supply E = Extract

Example 1: LKA-200 + MBB-160-200 -S
 Example 2: LKA-200 + MBC-125-200

LKA + CBC/CBE plenum box

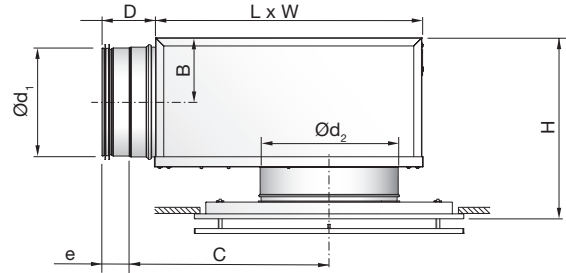

LKA + CBC/CBE

Ød ₁ mm	Ød ₂	B	C	D	e	H*	L	W
100	125	65	213	78	40	208 - 248	277	213
100	160	65	231	78	40	208 - 248	312	248
125	160	78	250	78	40	233 - 273	331	248
125	200	78	270	78	40	233 - 273	371	288
160	200	95	295	78	40	268 - 308	396	288
160	250	95	320	78	40	268 - 308	446	338
200	250	115	345	78	40	308 - 348	471	338
200	315	115	377	78	40	308 - 348	536	403
250	315	140	423	118	60	358 - 398	563	405
250	400	140	466	118	60	358 - 398	648	490
315	400	173	536	118	60	423 - 463	718	490

* Using accessory MBZ the H dimension will increase:

- Ød₂ = 125 - 200 mm => H +40 mm
- Ød₂ = 250 - 315 mm => H +60 mm
- Ød₂ = 400 mm => H +80 mm

Damper options



Order Code

Product _____

Type
CB _____

Damper
C = Blade damper supply
E = Blade damper extract

Duct connection Ød₁
Ø100-315 _____

Diffuser dimension Ød₂
Ø125 - 400 _____

Example 1: LKA-200 + CBC-160-200
 Example 2: LKA-200 + CBE-125-200

Formo - Ceiling diffuser

LKA

Technical data LKA + MBB-S/-E

Following LKA+plenum box data are valid for MBB-S/-E.
For MBC and MBE data, go to [LindQST Airborne calculator](#).

Capacity

Air flow q_v [l/s] and [m³/h], total pressure Δp_t [Pa], throw $l_{0,2}$ [m] and sound power level L_{WA} [dB(A)] can be seen in the diagrams.

Frequency-related sound power level

The sound power level in the frequency band is defined as $L_{WA}+K_{ok}$. K_{ok} values are specified in charts beneath the diagrams on the following pages.

Quick selection, supply air

LKA + MBB-S		$\Delta p_t \geq 50$ Pa		$\Delta p_t \geq 50$ Pa	
Duct	LKA	30dB(A)		35dB(A)	
$\varnothing d_1$	$\varnothing d_2$	l/s	m ³ /h	l/s	m ³ /h
100	125	31	112	38	137
100	160	40	144	49	176
125	125	42	151	50	180
125	160	53	191	64	230
125	200	63	227	75	270
160	160	60	216	73	263
160	200	70	252	88	317
160	250	94	338	115	414
200	200	98	353	118	425
200	250	106	382	129	464
200	315	133	479	159	572
250	250	116	418	141	508
250	315	136	490	167	601
250	400	139	500	182	655
315	315	153	551	183	659
315	400	169	608	200	720

Sound attenuation

Sound attenuation of the diffusers ΔL from duct to room, including and reflection, see table below.

LKA + MBB-S/-E		Sound attenuation ΔL [dB]							
Duct	LKA	Centre frequency Hz							
$\varnothing d_1$	$\varnothing d_2$	63	125	250	500	1K	2K	4K	8K
100	125	20	17	6	16	19	20	18	22
100	160	21	17	5	12	19	20	18	21
125	125	17	14	9	19	15	21	18	20
125	160	13	13	9	18	18	18	18	20
125	200	14	12	7	15	16	18	17	19
160	160	18	17	11	16	21	19	20	21
160	200	15	14	9	20	21	20	20	20
160	250	16	16	7	17	13	18	19	20
200	200	14	11	8	15	21	18	20	18
200	250	13	10	8	16	20	17	19	17
200	315	15	9	6	14	17	17	18	17
250	250	16	9	9	17	20	19	19	19
250	315	15	8	9	16	18	16	18	18
250	400	13	6	6	14	16	17	17	17
315	315	8	10	10	16	20	19	18	23
315	400	8	10	10	13	19	19	17	21

Balancing

Balancing guide, see the [MB installation instruction](#).

Formo - Ceiling diffuser

LKA

Technical data LKA + CBC/CBE

Following LKA+plenum box data are valid for CBC.
For CBE data, follow link below. For complete configuration of your LKA diffuser, go to the [LindQST Airborne calculator](#).

Capacity

Air flow q_v [l/s] and [m³/h], total pressure Δp_t [Pa], throw $l_{0,2}$ [m] and sound power level L_{WA} [dB(A)] can be seen in the diagrams.

Frequency-related sound power level

The sound power level in the frequency band is defined as $L_{WA} + K_{ok}$. K_{ok} values are specified in charts beneath the diagrams on the following pages.

Quick selection, supply air

LKA + CBC		$\Delta p_t \geq 50$ Pa 30dB(A)		$\Delta p_t \geq 50$ Pa 35dB(A)	
Duct $\varnothing d_1$	LKA $\varnothing d_2$	l/s	m ³ /h	l/s	m ³ /h
100	125	34	122	48	171
100	160	36	130	61	221
125	160	45	160	74	266
125	200	45	163	89	322
160	200	66	239	103	371
160	250	73	262	129	464
200	250	87	313	145	523
200	315	90	325	172	619
250	315	127	457	174	626
250	400	144	517	206	742
315	400	151	542	208	750

Sound attenuation

Sound attenuation of the diffusers ΔL from duct to room, including and reflection, see table below.

LKA + CBC/CBE		Sound attenuation ΔL [dB]							
Duct $\varnothing d_1$	LKA $\varnothing d_2$	Centre frequency Hz							
		63	125	250	500	1K	2K	4K	8K
100	125	25	18	16	15	19	21	13	13
100	160	25	13	15	14	18	17	11	9
125	160	22	13	12	14	20	18	12	12
125	200	20	18	13	14	19	17	11	11
160	200	20	9	11	14	17	15	12	10
160	250	22	11	14	14	16	13	11	9
200	250	23	7	12	15	18	13	13	11
200	315	19	9	13	13	16	11	12	9
250	315	17	9	11	14	16	12	11	7
250	400	17	9	13	12	13	11	11	7
315	400	18	6	13	14	13	13	11	12


Balancing

Balancing guide, see the [CBC/CBE installation instruction](#).

Technical data

Throw $l_{0,2}$

Throw $l_{0,2}$ [m] can be seen in the diagram for isothermal air, at a terminal velocity of 0.2 m/s.

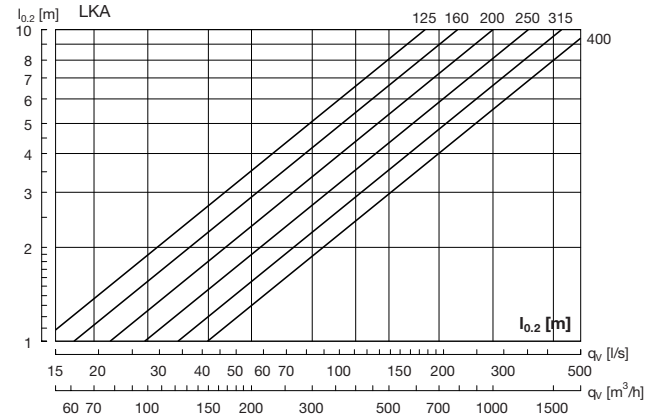

Correction throw $l_{0,2}$


LKA $\varnothing d$	1 - ways	2 - ways	3 - ways
125	2.3	1.8	1.3
160	2.3	1.8	1.3
200	2.3	1.9	1.3
250	2.3	2	1.3
315	2.3	2	1.3
400	2.2	2.1	1.3

Air jet distribution

l_b = Distance from the diffuser to the point where there is maximum dispersal.

b_v = Depth of the air jet on a vertical plane.

b_h = Width of the air jet on a horizontal plane.

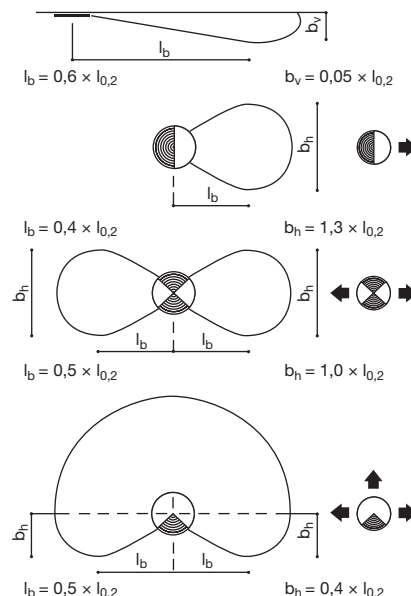


Formo - Ceiling diffuser


LKA

Technical data


LKA without box - supply air

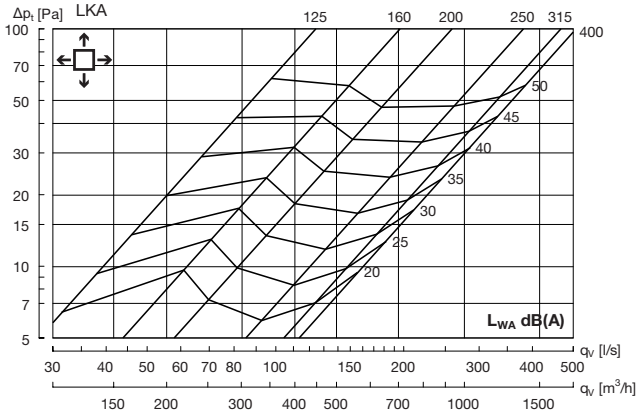

LKA 125 + MBB-S - Supply air

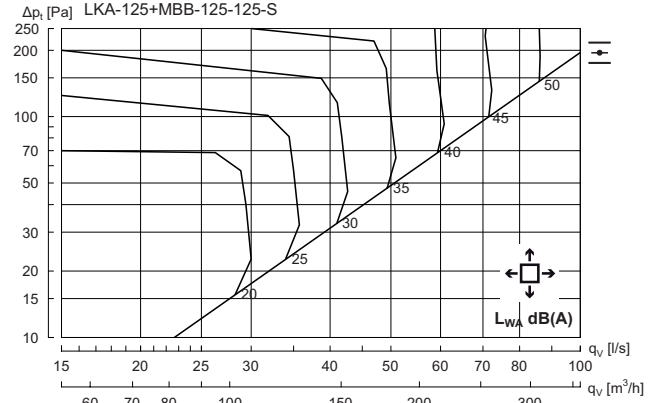

Hz	63	125	250	500	1K	2K	4K	8K
K_{stat}	12	6	1	-4	-4	-13	-20	-28

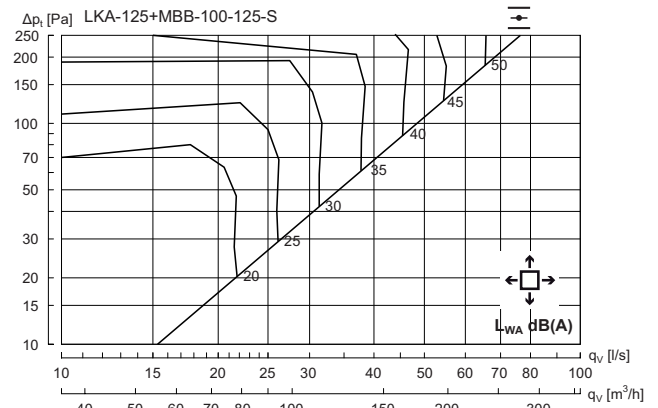


Hz	63	125	250	500	1K	2K	4K	8K
K_{stat}	11	7	3	-4	-5	-14	-18	-24

Formo - Ceiling diffuser

LKA


Technical data

LKA 160 + MBB-S - Supply air

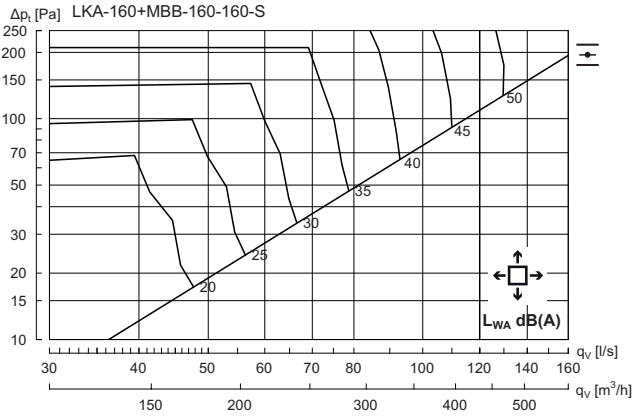


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	11	0	-2	-7	-15	-22	-28


LKA 200 + MBB-S - Supply air

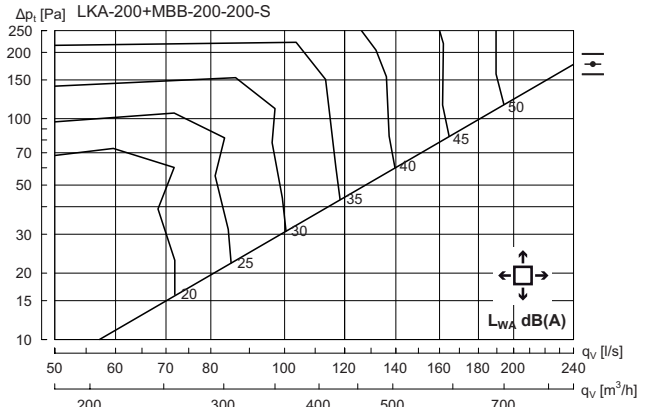


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	6	-1	-1	-5	-15	-21	-26

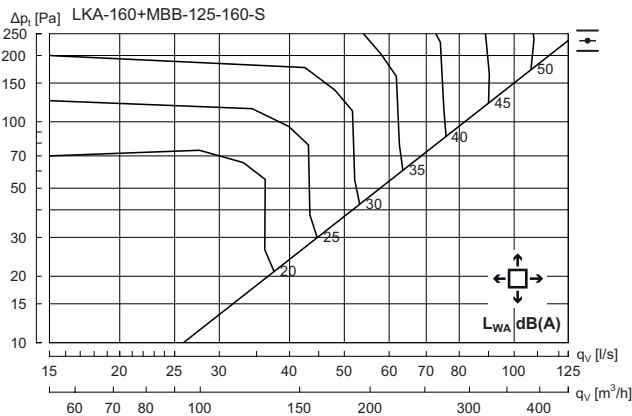


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	8	1	-3	-6	-12	-17	-25

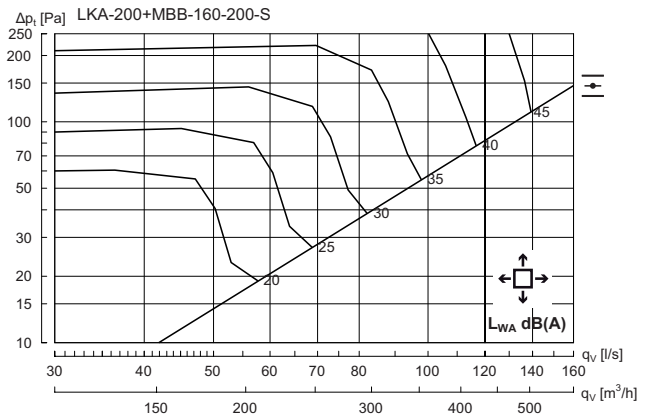

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	9	0	-2	-6	-12	-19	-24

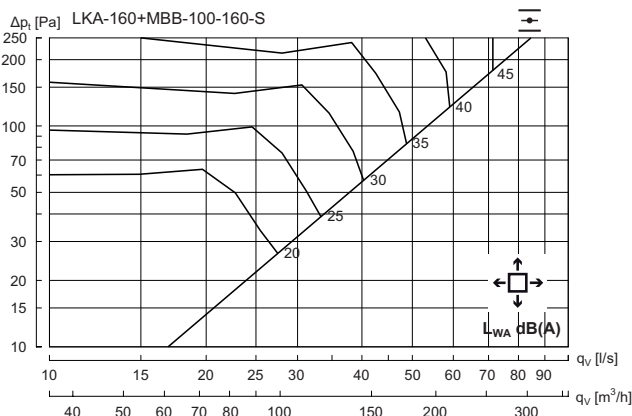

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	5	1	-2	-6	-10	-14	-20

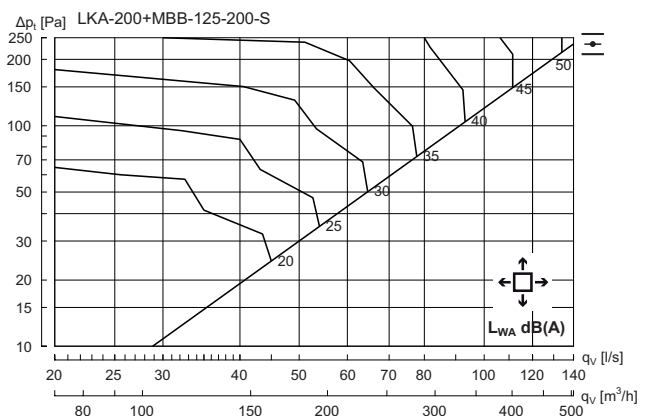


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	7	1	-3	-6	-11	-15	-21

Formo - Ceiling diffuser

LKA


Technical data

LKA 250 + MBB-S - Supply air

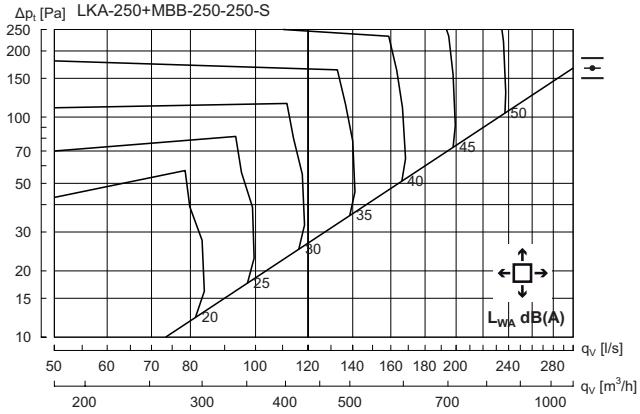


Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	12	3	-4	0	-4	-17	-24	-31


LKA 315 + MBB-S - Supply air

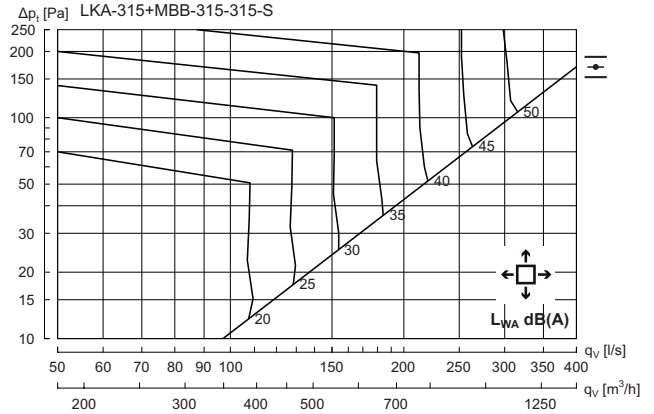


Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	13	5	-2	-1	-4	-17	-25	-36

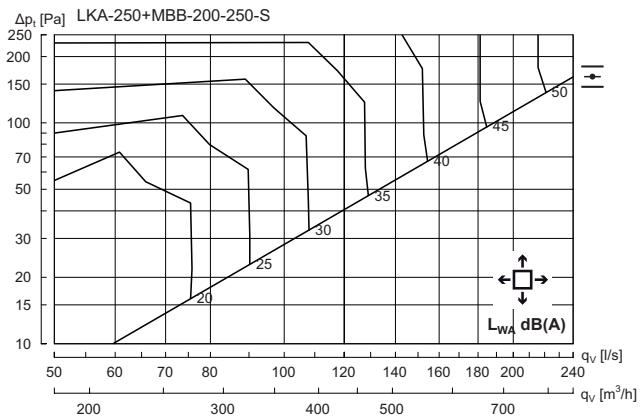


Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	12	6	-2	-1	-5	-14	-19	-23

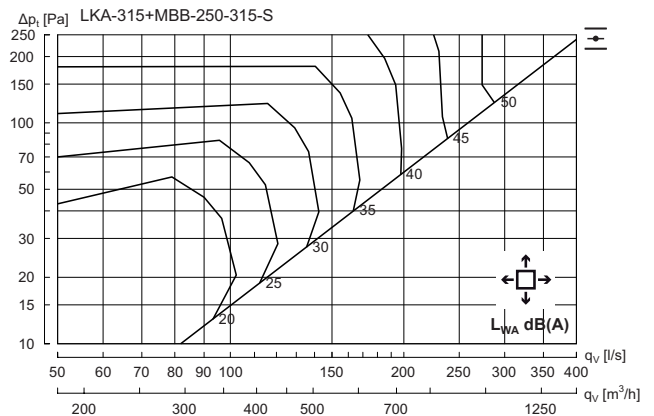

Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	14	5	-2	-2	-4	-13	-19	-26

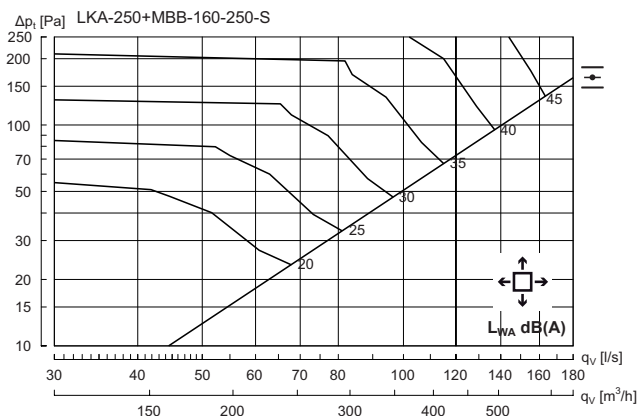

Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	9	7	-2	-3	-5	-10	-15	-21

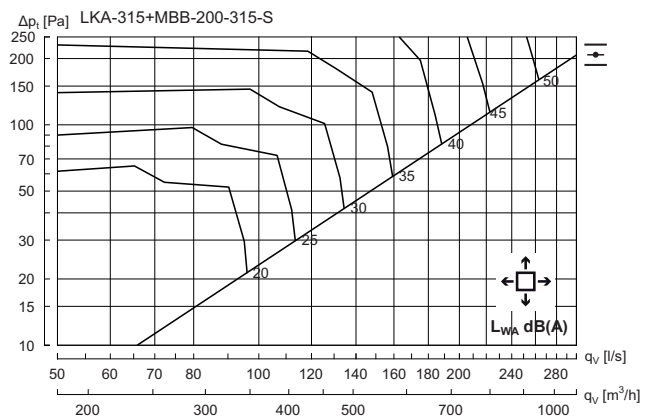


Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	13	6	-2	-3	-4	-11	-17	-22

Formo - Ceiling diffuser


LKA

Technical data

LKA 400 + MBB-S - Supply air

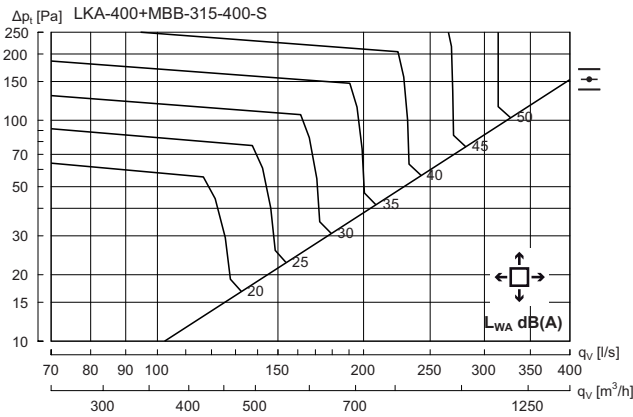

Hz	63	125	250	500	1K	2K	4K	8K
K_{sek}	14	6	1	-1	-6	-16	-21	-27

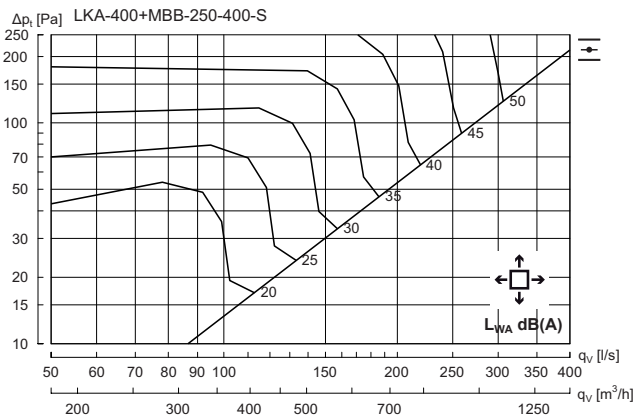

Hz	63	125	250	500	1K	2K	4K	8K
K_{sek}	12	7	0	-2	-6	-12	-19	-26

Correction sound power level (L_{WA}) and pressure loss (Δp_t)


LKA + MBB-S		1 - ways		2 - ways		3 - ways	
Duct	LKA	L_{WA}	Δp_t	L_{WA}	Δp_t	L_{WA}	Δp_t
$\varnothing d_1$	$\varnothing d_2$						
100	125	+ 10	x 1.3	+ 4	x 1.1	+ 2	x 1.05
100	160	+ 5	x 1.1	+ 2	x 1.05	+ 1	x 1
125	125	+ 10	x 1.35	+ 6	x 1.1	+ 4	x 1.05
125	160	+ 10	x 1.4	+ 4	x 1.1	+ 1	x 1
125	200	+ 4	x 1.2	+ 2	x 1.05	+ 1	x 1
160	160	+ 16	x 1.8	+ 9	x 1.3	+ 4	x 1.1
160	200	+ 16	x 1.7	+ 10	x 1.2	+ 4	x 1.05
160	250	+ 10	x 1.3	+ 6	x 1.1	+ 3	x 1
200	200	+ 17	x 2.3	+ 11	x 1.4	+ 7	x 1.1
200	250	+ 13	x 1.8	+ 6	x 1.2	+ 4	x 1.1
200	315	+ 9	x 1.5	+ 4	x 1.1	+ 0	x 1.05
250	250	+ 21	x 2.1	+ 11	x 1.4	+ 7	x 1.2
250	315	+ 19	x 1.8	+ 7	x 1.2	+ 3	x 1.1
250	400	+ 10	x 1.5	+ 6	x 1.2	+ 0	x 1
315	315	+ 21	x 2.1	+ 10	x 1.3	+ 4	x 1.1
315	400	+ 21	x 1.8	+ 8	x 1.5	+ 3	x 1.2

Formo - Ceiling diffuser


LKA

Technical data


LKA without box - Extract air

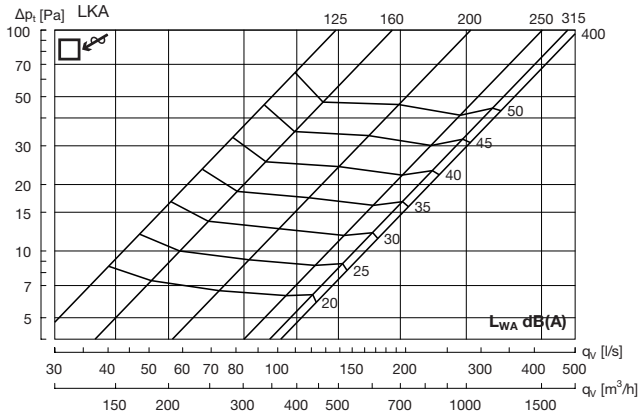

LKA 125 + MBB-E - Extract air

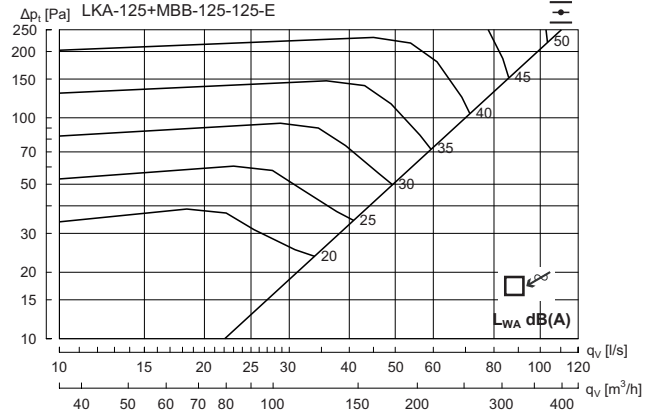

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	4	1	-2	-5	-12	-15	-22

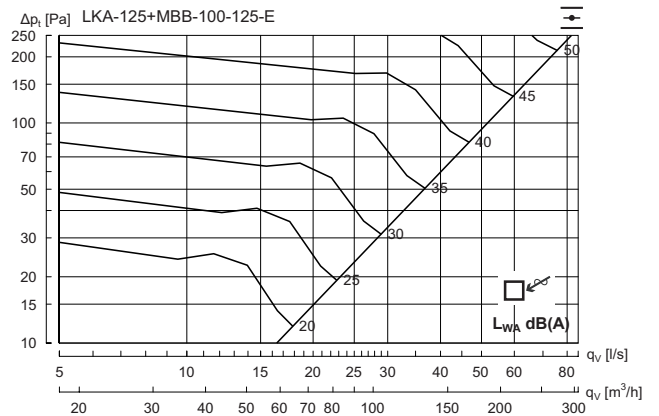


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	0	4	-2	-8	-11	-16	-22

Formo - Ceiling diffuser

LKA


Technical data

LKA 160 + MBB-E - Extract air

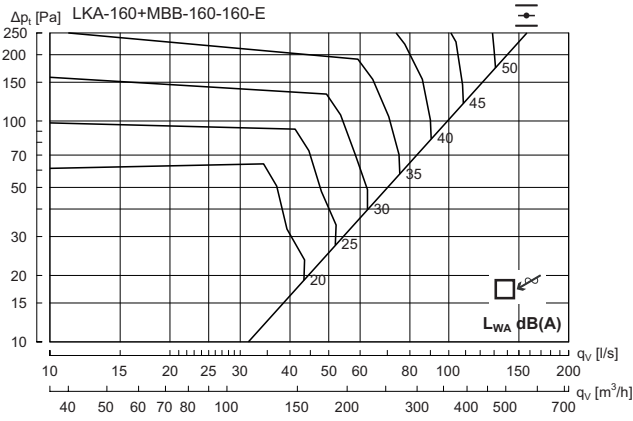


Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	16	6	1	-4	-5	-11	-17	-24


LKA 200 + MBB-E - Extract air

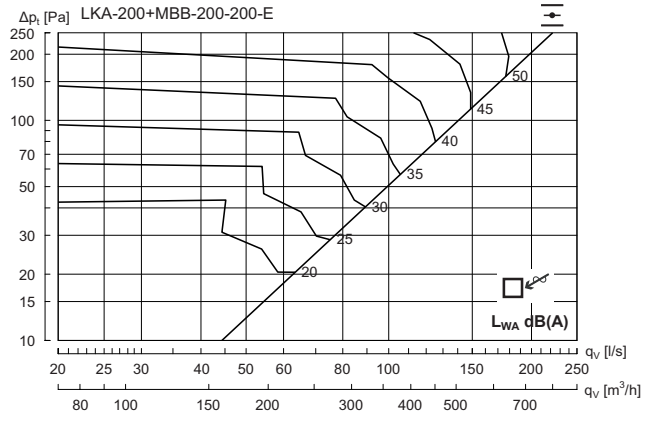


Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	14	6	0	-3	-5	-10	-19	-27

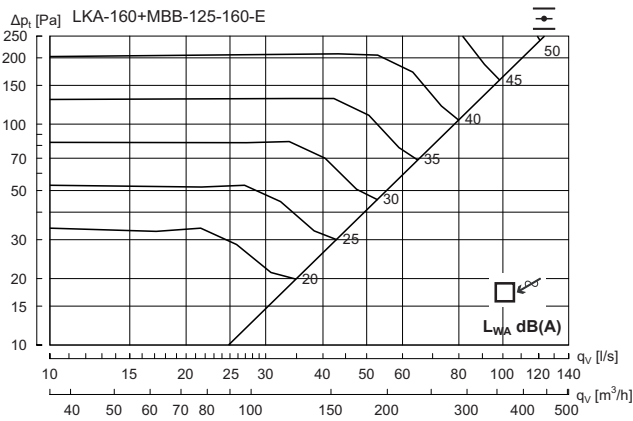


Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	12	6	2	-2	-7	-12	-14	-19

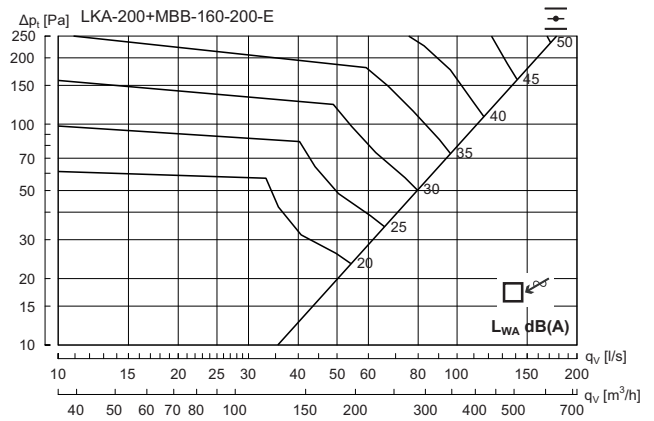

Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	16	7	-1	-4	-6	-10	-14	-20

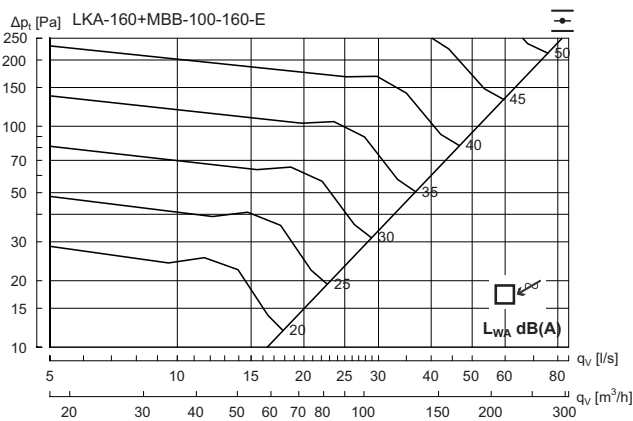

Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	11	-1	5	-2	-9	-13	-18	-24

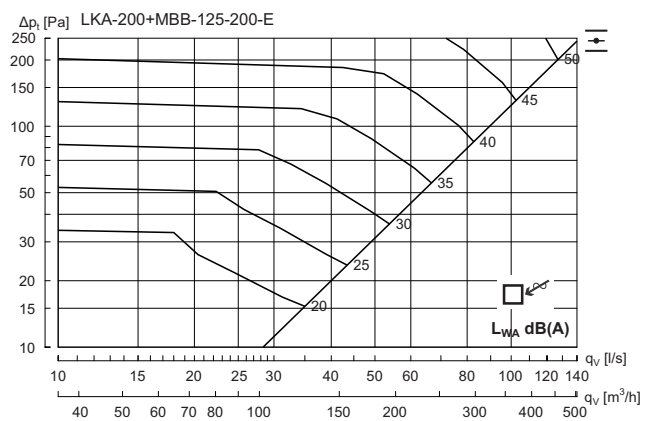


Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	11	3	0	-2	-5	-11	-14	-21

Formo - Ceiling diffuser

LKA


Technical data

LKA 250 + MBB-E - Extract air

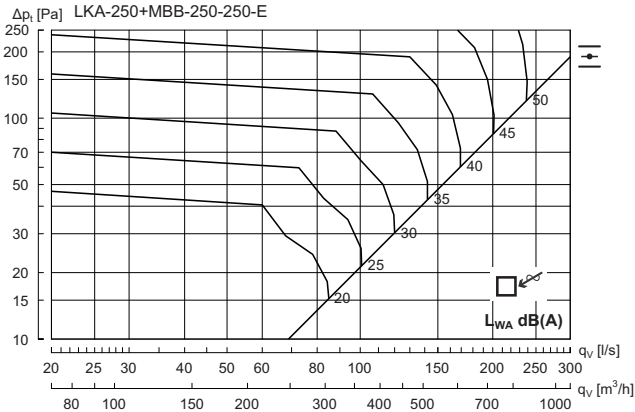


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	4	-1	-3	-3	-12	-19	-30


LKA 315 + MBB-E - Extract air

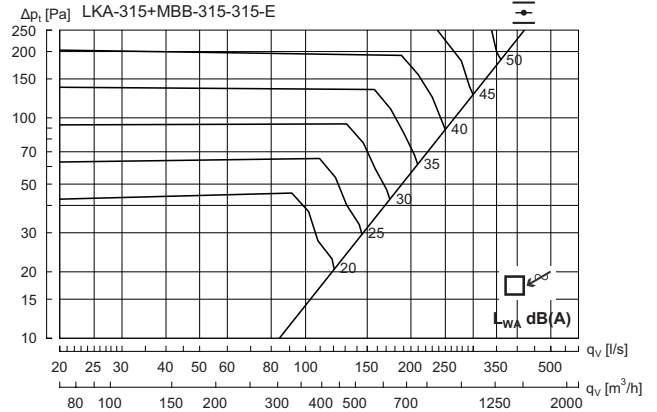


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	5	2	-2	-6	-12	-17	-27

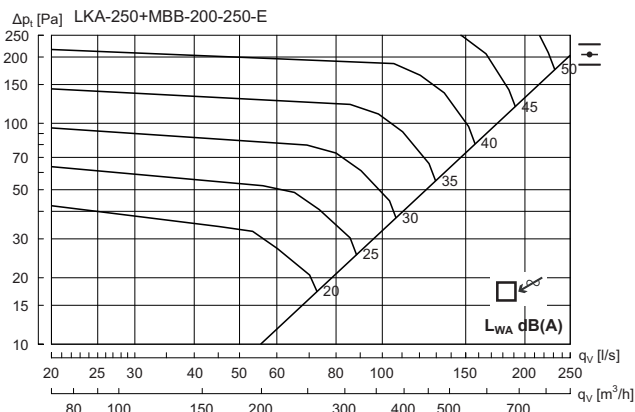


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	3	-1	-3	-4	-11	-15	-24

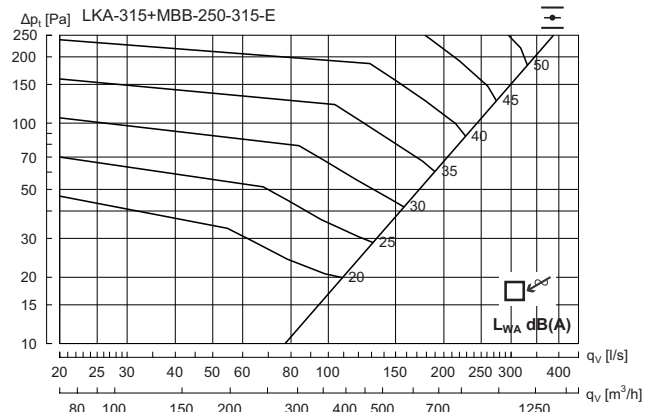

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	10	5	1	-2	-6	-10	-16	-24

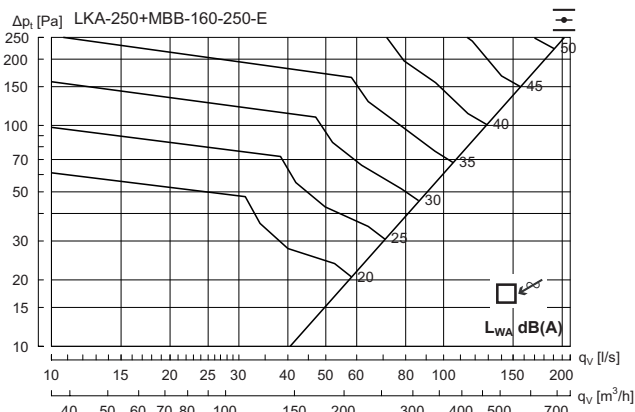

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	14	6	0	-3	-5	-11	-15	-19

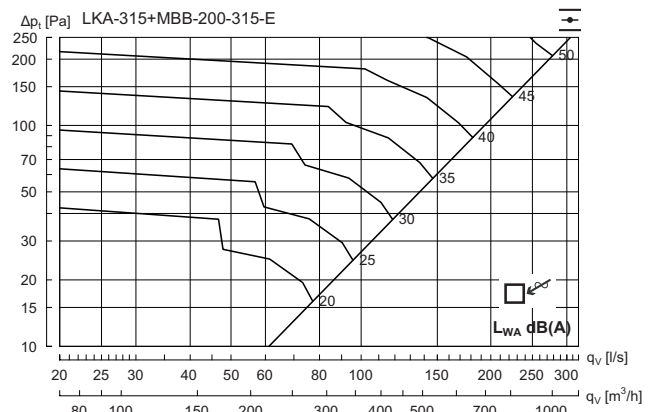


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	14	5	0	-2	-6	-12	-14	-22

Formo - Ceiling diffuser


LKA

Technical data

LKA 400 + MBB-E - Extract air

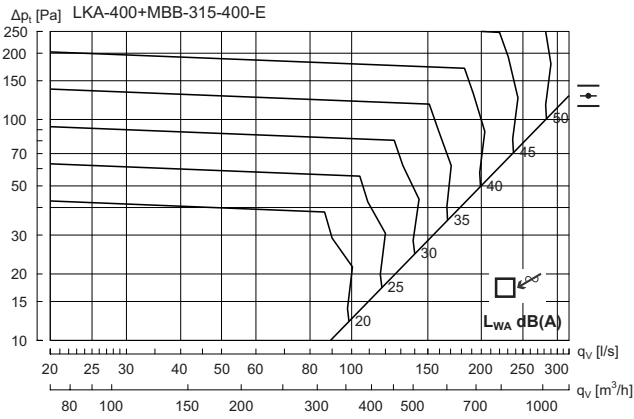

Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	10	5	0	0	-6	-15	-20	-27

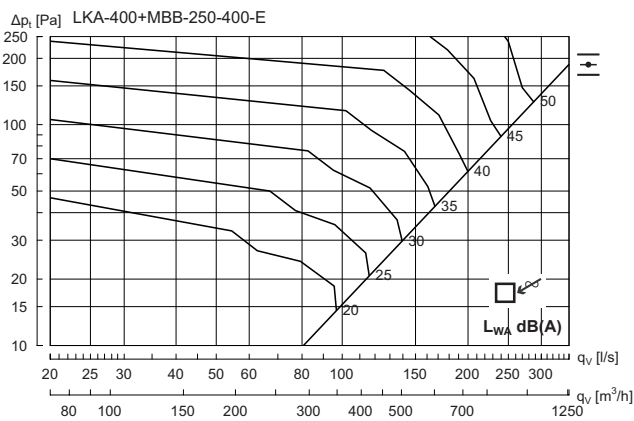

Hz	63	125	250	500	1K	2K	4K	8K
K_{sk}	12	5	1	-1	-7	-12	-16	-24



Most of us spend the majority of our time indoors. Indoor climate is crucial to how we feel, how productive we are and if we stay healthy.

We at Lindab have therefore made it our most important objective to contribute to an indoor climate that improves people's lives. We do this by developing energy-efficient ventilation solutions and durable building products. We also aim to contribute to a better climate for our planet by working in a way that is sustainable for both people and the environment.

[Lindab](#) | For a better climate